



TANDEM KROSS 10/22 Single Bumper Installation Instructions

V2.0

www.tandemkross.com


For more info or support contact CustomerService@tandemkross.com

Attention:

Before you begin, be certain that your rifle is clear and safe.

You will need a small Phillips and a large flathead screwdriver for assembly.

1. Place the hex nut into the top portion of the magazine bumper as shown by the red arrow.

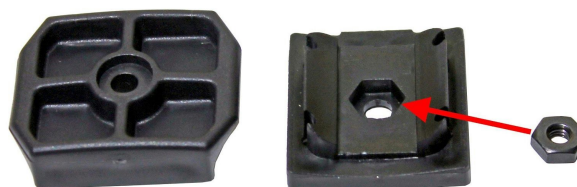

2. Orient the same top portion of the bumper such that the hole in the front is facing the front part of the Ruger® magazine (which has the recess).



3. Use a small Phillips screwdriver and screw the (4) identical screws clockwise to secure the top portion of the bumper to the magazine. **DO THIS CAREFULLY** as too much force can potentially strip them. They need to be secured with light pressure until you feel them reach the bottom.



4. Now attach the bottom portion of the bumper using the large screw and a flathead screwdriver. Make sure you orient the hole in the front so that it will accept the [TK] logo badge. The badge can be pressed in and is maintained by friction.

