



“Sentinel” Captured Spring Guide Rod for Smith & Wesson SW22 Victory Installation Instructions

V1.0

www.tandemkross.com


For more info or support contact CustomerService@tandemkross.com

Attention:


Before you begin, be certain that the magazine is removed and the chamber is clear.

You will need a 1/8" allen wrench

1. Remove the takedown screw using the 1/8" allen key. Separate the barrel from the frame and remove the bolt from the receiver.

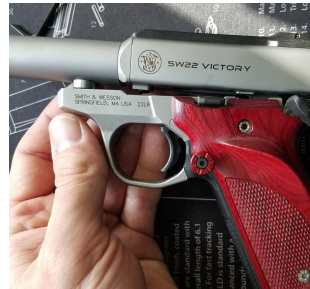

2. With the bolt positioned as shown, push end of original factory guide rod through the slot to remove it. Position the new captured spring with brass washer toward the bolt face and the brass cap towards the rear of the bolt. Compress the spring by pressing on brass cap (about 1/8") and slide into the slot of the bolt.

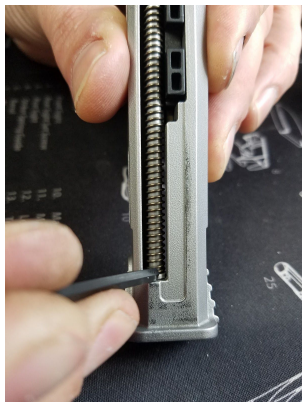

3. Below are two views of the brass cap in the proper installed position. Install the bolt into the receiver and reattach the receiver and barrel to the frame. You have successfully completed the installation.

