



**“Wingman” +5 Magazine Base Pad
for Taurus™ TX-22
Installation Instructions
V1.0**

www.tandemkross.com

For more info or support contact CustomerService@tandemkross.com

Attention: Before you begin, be certain that the magazine is removed and the chamber is clear.

You will need a Size #1 Phillips head screwdriver for the base pad screws

This kit includes “Green Springs” magazine springs, base pads, shim and screws.



1. Compress the magazine spring plate.




2. Slowly slide the factory base plate off of the magazine being careful to not allow the spring and spring plate escape.



3. Remove the follower button



4. These are all of the components that will be set aside and not reinstalled - original factory spring, base plate, spring plate, and follower button.

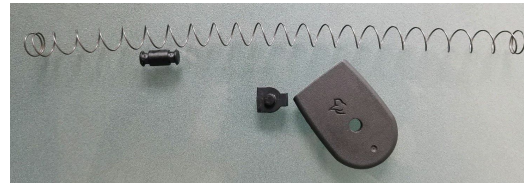

5. Place the shim over the post on the follower with the rounded side toward the center and the flat side to the outside of the magazine. Insert the Green Spring onto the post. Put the follower along with the shim and spring into the magazine.




6. Slide the top half of the new Wingman bumper over the magazine in the orientation shown.



7. Install base pad over the spring as shown. Slowly compress the spring (without kinking) and mate the parts together.



8. Install the supplied Phillips head screws and tighten until there is no gap is present between the upper and lower sections of the bumper.



9. Insert an allen wrench or similar tool in the track of the magazine near the bottom and hook onto the spring. Pull toward the top of the magazine and slowly release to make sure the spring has not buckled in the bottom of the bumper.



10. Installation is complete.
Enjoy your new TANDEMKROSS "Wingman" +5 Magazine Base Pads!

